

# Installation Guide


## REDtip Roof Hook M100

Compatible with plain tiles


See REDtip selector chart



- 1 Remove tile/s and identify a suitable rafter to attach the REDtip roof hook. Ensure the screws are fully tightened to secure the roof hook.

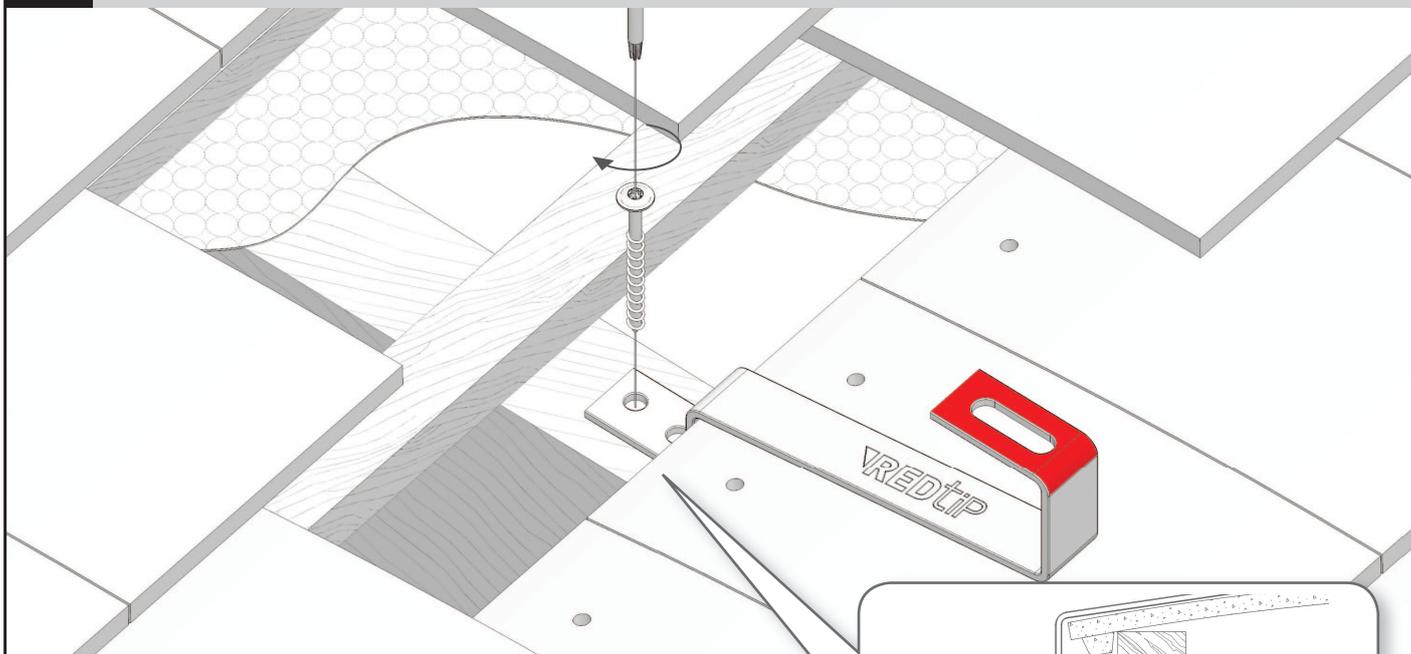

- 2 To ensure a weather tight fit, you may have to grind the lip of tile to the depth of the hook.

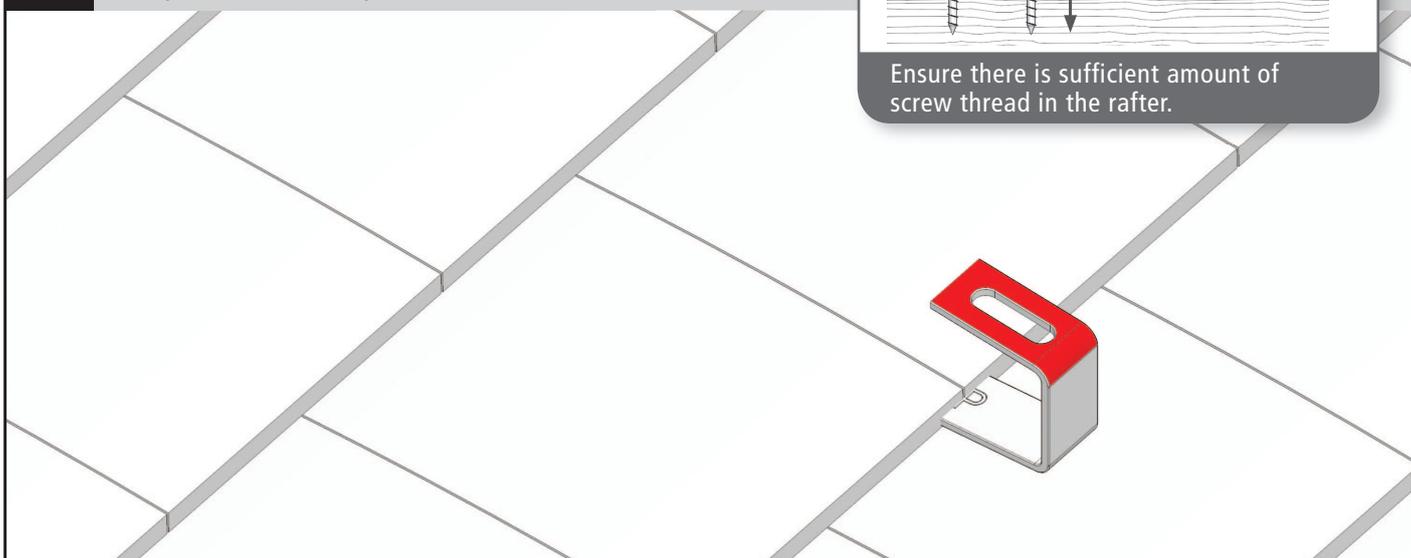

- 3 The distances between the roof hooks will be dependant on structural and wind loadings. Always consult a Structural Engineer if you are in any doubt. Maximum recommended distance between the roof hooks is 1.6m.

**REDtip**<sup>TM</sup>  
solar mounting systems



Visit our website and see how it's done in real time action, by scanning the QR code. You can download QR readers from App Store.

www.redtip.co